


NLG Super Bungee Chainsaw Lanyard Product Code: 101610

Max Load: 10 KG / 22 LBS

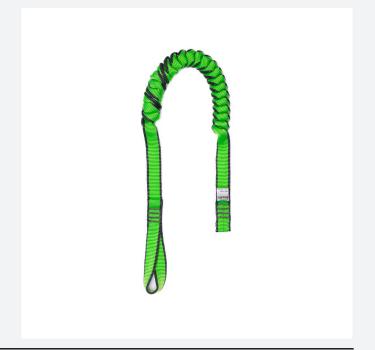

OVERVIEW

The Super Bungee Chainsaw Lanyard is the ultimate solution to securing your chainsaw whilst working at height. The Super Bungee provides a compact footprint to help avoid snagging whilst the easy-stretch nature allows 2 metres of reach and also dampens the force in the case of a drop.

VIEW ONLINE

https://neverletgo.com/products/super-bunge e-chainsaw-lanyard/



NLG **ID**[™] Serialised and safe

Simply scan the NLG ID tag with your phone to instantly access certificates, instruction videos and log inspections. (See Specification if included).



Third-party tested and certified

Independent laboratory load testing certificates and Declarations of Conformity are available on request. Please contact team@neverletgo.com.

NEVERLETGO.COM 1

DESCRIPTION	The result of a long development, working closely with the Arb Industry, The Super Bungee Chainsaw lanyard is the benchmark for chainsaw lanyards. The lanyard uses unique SoftTouch™ webbing which remains supple in the harshest working environments, whilst the Super Bungee both dampens forces in the event of a drop and provides all-day comfort. With safety in mind, the visual wear indicator strips provide a quick and easy check for inspection prior to use and allow damage affecting the integrity of the lanyard to be easily identified. Complete with two small webbing loops for attaching your own hardware, and a larger lay-flat loop which provides a low-profile attachment point for either the tool or harness for safety and comfort.	
FEATURES	Ultra-durable wear-resistant Soft Touch™ Nylon Webbing Easy visual inspection with contrast stitching and edges Compact Super Bungee reduces snagging hazards whilst providing easy reach and extension Reduced shock loading due to clever bungee design Lay flat webbing loops ensure low-profile attachment points on the tool and harness for safety and comfort in use. An integral loop allows for a choice of connectors when holstering.	
TECHNICAL SPECIFICATION	Max Load: 10 KG / 22 LBS Safety Standards: ANSI/ISEA 121-2018, CE / UKCA, NS 9611:2022+AC Load Tested and Third-party Certified: Dynamic (2:1 Safety Factor) NLG ID™ Technology / Scannable Compatible Unique Serial Number Dimensions: Extends from 80cm to 200cm	
RETAIL	EAN (GTIN-13) 5060572181007	UNIT WEIGHT (G) 110
SHIPPING	HS CODE 5609.00.0000	COUNTRY OF ORIGIN Taiwan

NEVERLETGO.COM 2



Super Bungee Chainsaw Lanyard

Product Code: 101610

View online

https://neverletgo.com/products/super-b ungee-chainsaw-lanyard/

Learn more about:
Dropped object prevention
Tool tethering
Tool lanyards

Useful resources: Tool Box Tool Tether Guide Library

CONTACT	+44 (0)330 016 0030 neverletgo.com
INSPECTION	In addition to routine checks before each use, all equipment should undergo regular detailed inspections, conducted and recorded by a competent person using the NLG Inspection Checklist. If any part is worn or shows signs of degradation, immediately retire from service. In the event of a drop, quarantine the equipment for a thorough inspection.
	Click to download Inspection Checklist
LEGAL	NLG makes every effort to ensure the information in this Datasheet is accurate and current. However, NLG reserves the right to change the product specification when necessary. NLG cannot be held responsible for any inaccuracies or omissions. Copyright © 2023. NLG © and Never Let Go © are registered trademarks.

NEVERLETGO.COM 3